

INSTRUCTIONS

Velcro Spring Wall - Small


Includes:
Frame
Banner
Black Canvas Carrying Bag

1



Remove spring wall from carry case.

2

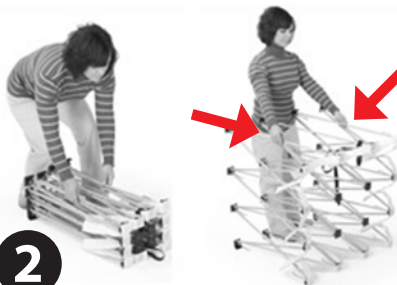


Pull hardware so hardware latticing expands. Hardware can be expanded vertically or horizontally depending on convenience and/or use.

3



Interlock central, front-side and back-side hooks followed by hooks on top then bottom. This may require assistance. For greater leverage, lay the frame flat on the floor to interlock hooks.

4



Line up Velcro on banner to hardware and affix banner to hardware. Banner should be taut when completely affixed to hardware.

IMPORTANT: When taking kit down make sure to verify that ALL hooks have been disconnected from each other.

Note: Although it is possible to leave the banner connected to hardware upon taking kit down, it is not advised as damage to the hardware and banner could result should the banner become caught in the latticing.

